

International Journal of Modern Physics A
© World Scientific Publishing Company

The Tunka Experiment: Towards a 1-km² Cherenkov EAS Array in the Tunka Valley.

D.Chernov, N.Kalmykov, E.Korosteleva, L.Kuzmichev, V.Prosin, M.Panasyuk, A.Shirokov,
I.Yashin

Scobeltsyn Institut of Nuclear Physics of MSU, Moscow, Russia

N.Budnev, O.Gress, L.Pankov, Yu.Parfenov, Yu.Semeney

Institute of Applied Physics of ISU, Irkutsk, Russia

B.Lubsandorzhev, P.Pohil

Institute for Nuclear Research of RAS, Moscow, Russia

V.Ptuskin

IZMIRAN, Moscow, Russia

Ch.Spiering, R.Wischnewski

DESY-Zeuthen, Zeuthen, Germany

G.Navarra

Universita' Torino, Italy

The project of an EAS Cherenkov array in the Tunka valley/Siberia with an area of about 1 km² is presented. The new array will have a ten times bigger area than the existing Tunka-25 array and will permit a detailed study of the cosmic ray energy spectrum and the mass composition in the energy range from 10¹⁵ to 10¹⁸ eV.

Keywords: new EAS Cherenkov array; wide energy range.

Introduction

The nature of Galactic sources of high and ultrahigh energy cosmic rays is not clear, despite of essential progress in the theory of their acceleration and propagation. To understand the nature of sources, reliable experimental data about energy spectrum and mass composition in the range of 10¹⁵ - 10¹⁸ would be essential. This range includes as well the "classical" knee [1] at energy $3 \cdot 10^{15}$ eV, as also the range of energies 10¹⁷ - 10¹⁸ eV, considered now as maximum reachable by cosmic rays accelerated in Galactic supernova remnants [2].

It is known, that the most reliable method of cosmic rays energy measurement in the specified energy range is the method of EAS Cherenkov light observation.

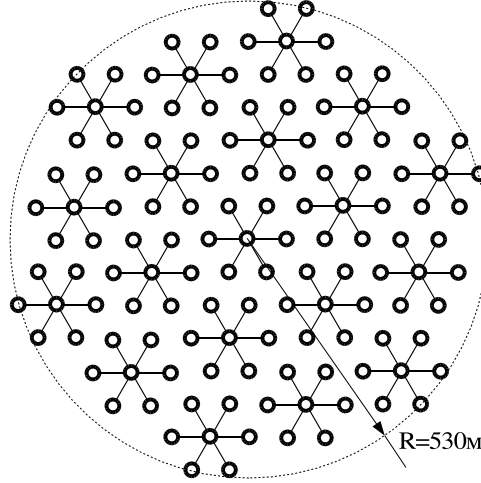


Fig. 1. *TUNKA-133 array. Minimal distance between detectors is 85 m. Seven detectors form a cluster.*

A series of such experiments are carried out in Tunka Valley (50 km from lake Baikal) since more than 10 years: Tunka-4 [3], Tunka-13 [4] and Tunka-25 [5]. The latter array consists of 25 detectors on the basis of PMT QUASAR-370 and 4 detectors with pulse shape recording on the basis of PMT Torn-EMI D669. To study charged particles at surface, water Cherenkov detectors with an area of 10 m^2 are planned to be added to the array. The detectors cover an area of $\sim 0.1\text{ km}^2$.

The construction of the TUNKA-133 array will allow us to expand the sensitive area by almost 10 times. For one season of data taking (400 hours) we plan to collect $\sim 3 \cdot 10^5$ events with energies above $3 \cdot 10^{15}\text{ eV}$, ~ 200 events with energies higher than 10^{17} eV , and a handful events with energies higher than 10^{18} eV .

Array Description

The new array will consist of 133 optical detectors on the basis of PMT EMI 9350 (diameter of photocathode of 20 cm). The plan of the array is shown in fig. 1. The 133 detectors are grouped in 19 clusters of seven detectors each. The analog electronics is designed to provide a high dynamic range (10^4).

The functional scheme of the cluster electronics is shown in fig. 2. The electronics will be placed inside industrial computers with ISA interface. Data acquisition and management will be carried out by a single-board industrial computer PCA-6145, connected with the control center through Ethernet.

The measuring channels will be designed on the basis of 10-bit ADCs AD9410 and Xilinx microchip FPGAs. The continuous digitizing of signals with step widths of 5 ns allows to discard traditional TDCs and to replace analog discriminators by digital ones. Digitizing of signals at the central detector of each cluster, with steps of 2.5 ns, allows to measure the pulse form and to deduce the FWHM.

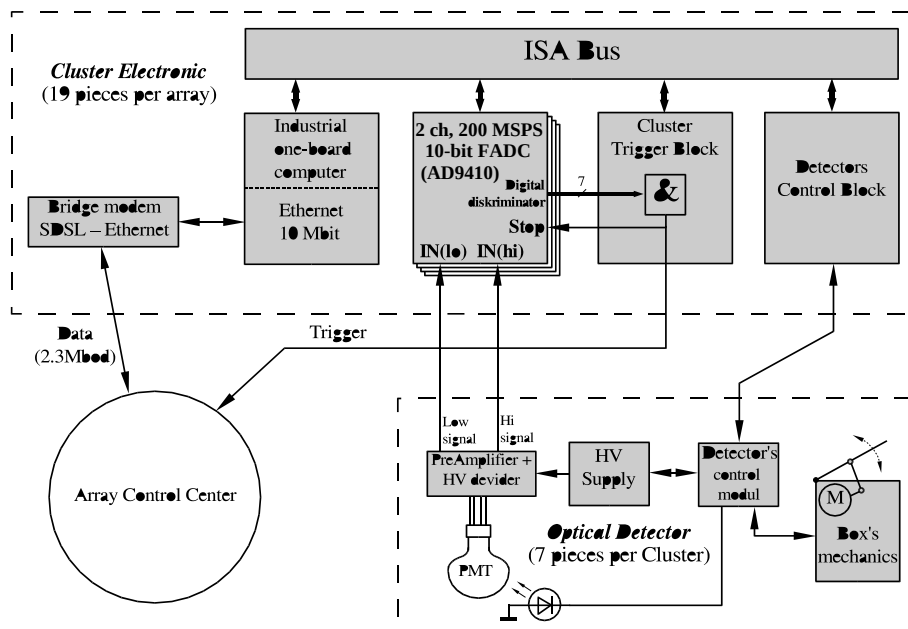


Fig. 2. Functional scheme of cluster electronics.

The cluster trigger condition will be ≥ 3 detectors during the resolution time of 0.5 microsec. The rate of single-cluster triggers will be about 2 Hz, and the cluster data stream about ~ 2 Kb/sec.

The reconstruction of EAS parameters will be carried out with methods, developed for the TUNKA-25 array [6]. These methods provide an accuracy of core location of about 6 m and a primary energy resolution of about 15%. The error in X_{max} will be about 35 g/cm² for the LDF-steepness method, and about 25 g/cm² for the pulse FWHM method.

Acknowledgements

Present work is supported by Russian Fund of Basic Researchs (grants 02-02-17162 and 03-02-16660). The PMTs EMI 9350 (200) have been provided by INFN from the former MACRO experiment.

References

1. G.Kulikov and G.Khristiansen, *rus. JETP* **35**, 653 (1958).
2. V.Ptuskin, V.Zirakashvili, *Astron. Astroph.* **403**, 1 (2003).
3. S.Bryanski et al., *Proc. 24th ICRC, Roma* **2**, 724 (1995).
4. O.Gress et al., *Nuclear Physics B (Proc. Suppl.)* **75A**, 299 (1999).
5. N.Budnev et al., *Proc. 27th ICRC, Hamburg* **2**, 581 (2001).
6. D.Chernov et al., *International Journal of Modern Physics A* **this volume**, ? (2004).